

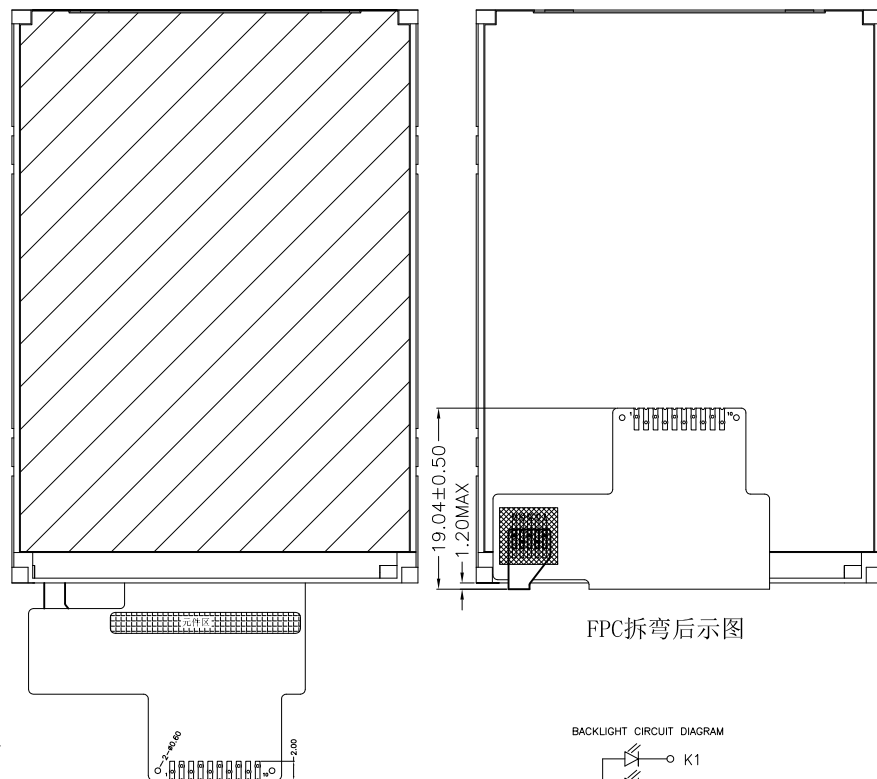
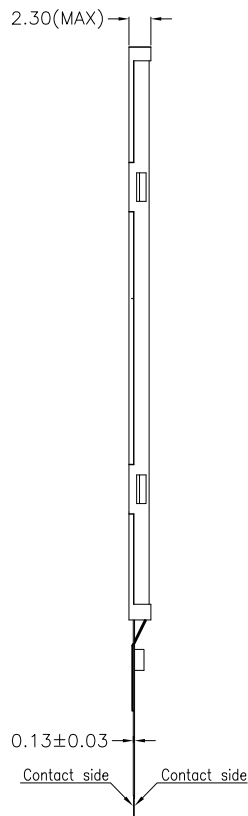


Revised Record	1.0	New Issue	2015-10-30						
----------------	-----	-----------	------------	--	--	--	--	--	--

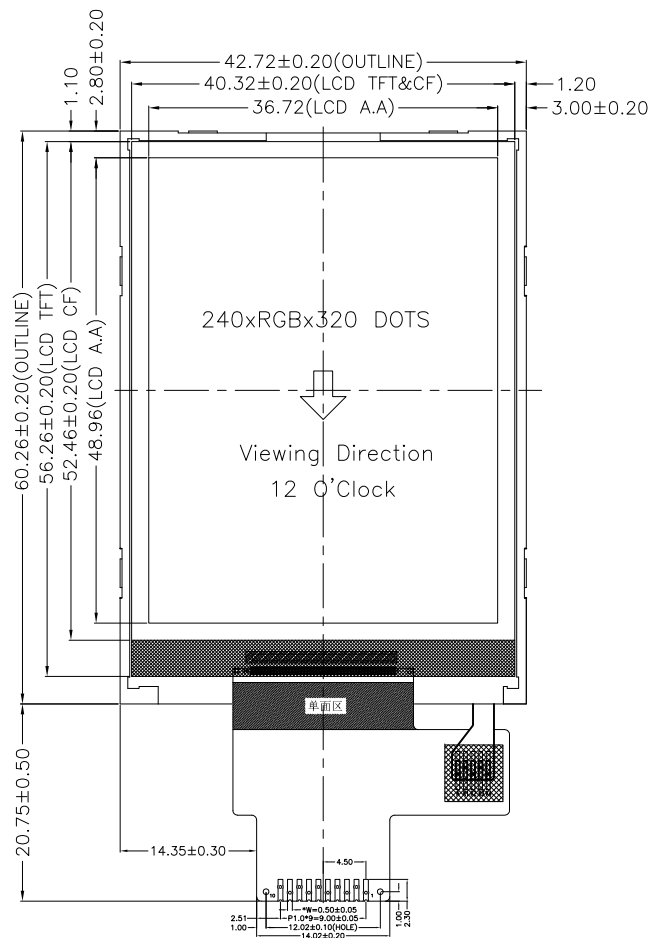

PIN	Define
1	GND
2	RS
3	CS
4	SCL
5	DATA
6	RESET
7	VDD
8	VSS
9	LED+
10	LED-



DISPLAY TYPE:	2.4" TFT	DISPLAY DRIVER:	HX83471	PIXEL PITCH:	0.153 X 0.153 mm
POLARIZER MODE:	TRANSMISSIVE	OPERATING TEMP:	-20°C TO +70°C	BACK LIGHT:	LED WHITE(X4), 并联
VIEWING DIRECTION:	12 O'CLOCK Gray inversion	STORAGE TEMP:	-30°C TO +80°C		
Dot matrix:	240(RGB)X320 DOTS	STRUCTURE:	LCD+IC+FPC+BL	MATERIAL NOTE	ROHS REQUEST

BLAZE Blaze Display Technology Co., Ltd.

DESIGNED BY: BDT-23	BDT-T2410-01-SERIES	VERSION: 1.0
CHECKED BY: BDT-09		PAGE 1 OF 1
APPROVED BY: BDT-05		UNIT: mm
Website: http://www.blazedisplay.com		DATE: 2015-10-30